




Nastavení domény pro telefony Siemens Gigaset


Typy: C610 IP, A510 IP, A580 IP, C590 IP

- 1) Pro vstup do webového rozhraní telefonu je nutné zjištění IP adresy. Pro zobrazení IP adresy na displeji Vašeho telefonu stiskněte tlačítko na základně (viz. obrázek č. 1).

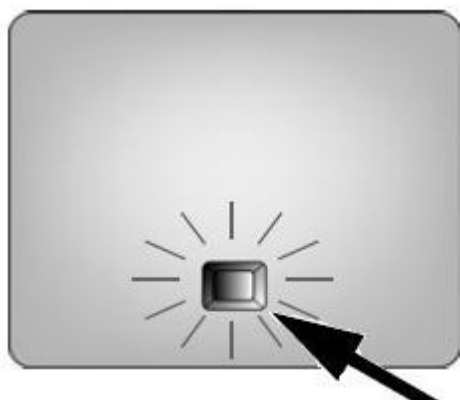


(obrázek č. 1)

- 2) IP adresu zobrazenou na displeji Vašeho telefonu zadejte do webového prohlížeče (viz. obrázek č. 2) a stiskněte **ENTER**.

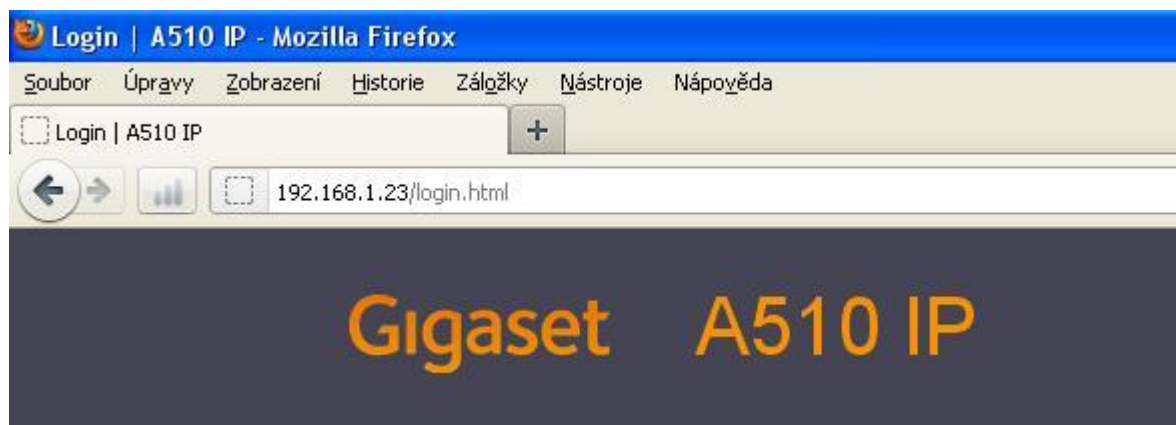


(obrázek č. 2)

- 3) Po zadání IP adresy do prohlížeče, se Vám zobrazí přihlašovací stránka (viz. obrázek č. 3). Zde do prázdného políčka zadejte svůj **PIN** (defaultně je PIN od výrobce přednastaven na **0000** (čtyři nuly) a stiskněte tlačítko **OK**.

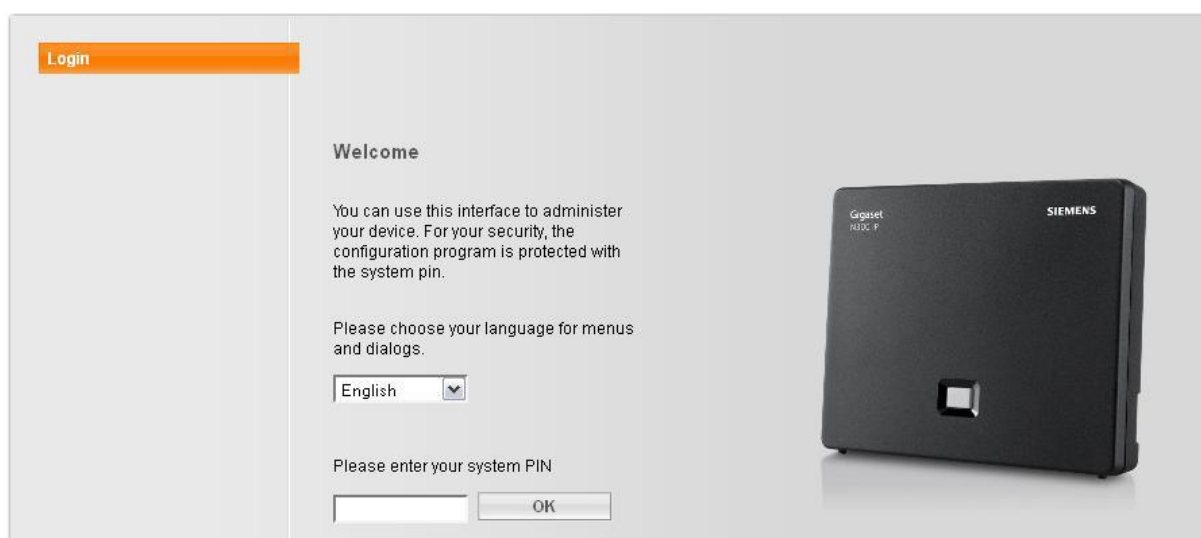


(obrázek č. 3)

4) Po přihlášení se přesuňte na záložku **SETTINGS** (viz. obrázek č. 4).

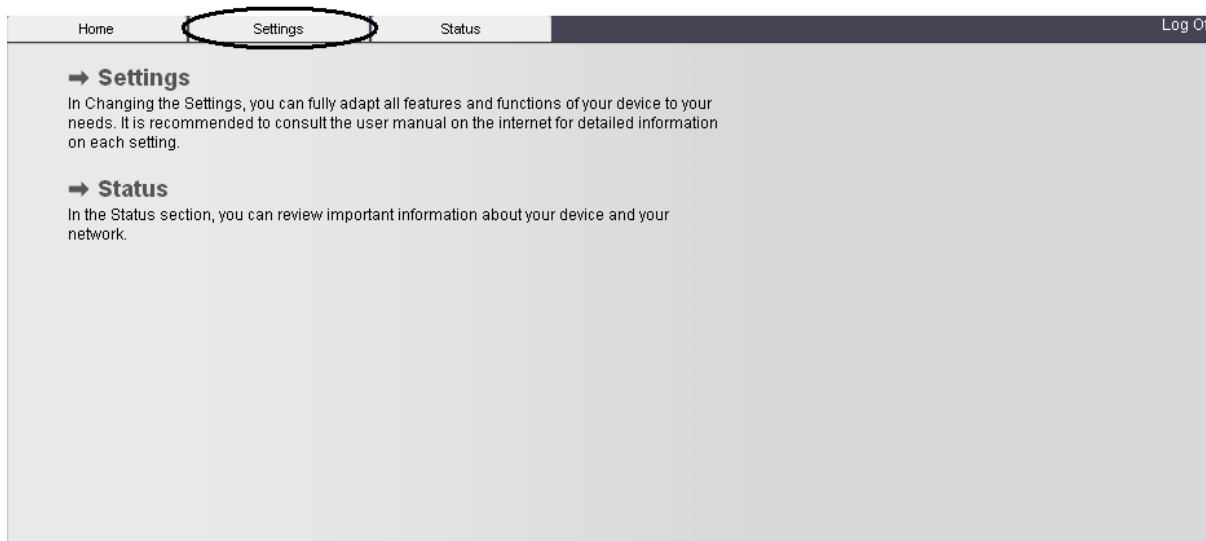

(obrázek č. 4)

5) Na stránce SETTINGS (viz. obrázek č. 5) vyberte položku **TELEPHONY** (viz. 1. krok). Poté stiskněte tlačítko **EDIT** v řádku 1. (IP1) (viz. 2. krok).

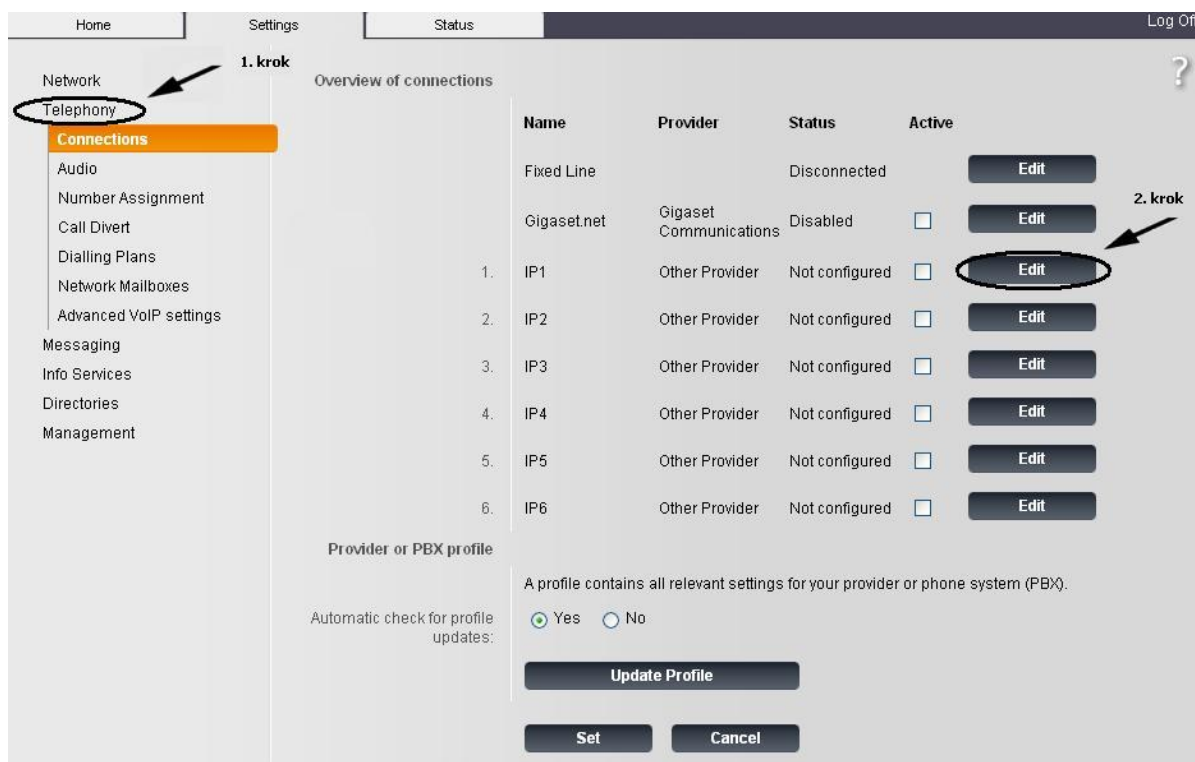

(obrázek č. 5)

- 6) Po stisknutí tlačítka EDIT se přesunete na stránku s nastavením Vašeho telefonního čísla (viz. obrázek č. 6). Stiskněte tlačítko **SHOW ADVANCED SETTINGS** (viz. 3. krok).

The screenshot shows a web interface for SIP configuration. The top navigation bar includes 'Home', 'Settings', 'Status', and 'Log Off'. A left sidebar lists various settings categories: Network, Telephony (with 'Connections' highlighted), Audio, Number Assignment, Call Divert, Dialling Plans, Network Mailboxes, Advanced VoIP settings, Messaging, Info Services, Directories, and Management. The main content area is titled '1. IP Connection' and contains the following fields and buttons:

- Assignment instruction: 'Assign a connection name or actual phone number for identification.'
- Field: 'Connection Name or Number:' with value 'Vase tel. cislo'.
- Section: 'VoIP Configuration / Profile Download' with a 'Start Configuration Assistant' button.
- Field: 'Provider:' with value 'Other Provider'.
- Field: 'Profile Version:' (empty).
- Section: 'Personal Provider Data'.
- Field: 'Authentication name:' with value 'Vase tel. cislo'.
- Field: 'Authentication password:' with value 'Vase SIP heslo'.
- Field: 'Username:' with value 'Vase tel. cislo'.
- Field: 'Display name:' with value 'Vase tel. cislo'.
- Buttons: 'Set', 'Cancel', and 'Delete Connection'.

The 'Show Advanced Settings' button is circled in red, and an arrow labeled '3. krok' points to it.

(obrázek č. 6)

- 7) Změnu ústředny provedete změnou adresy v řádcích **DOMAIN**, **PROXY SERVER ADDRESS** a **REGISTRATION SERVER** na **sip4.fayn.cz** (viz. obrázek č. 7, 4.krok, níže).

Home Settings Status Log Off

Network
Telephony
Connections
Audio
Number Assignment
Call Divert
Dialling Plans
Network Mailboxes
Advanced VoIP settings
Messaging
Info Services
Directories
Management

1. IP Connection

Assign a connection name or actual phone number for identification.

Connection Name or Number: Vase tel. cislo

VoIP Configuration / Profile Download

Start Configuration Assistant

Provider: Other Provider

Profile Version

Personal Provider Data

Authentication name: Vase tel. cislo

Authentication password: Vase SIP heslo

Username: Vase tel. cislo

Display name: Vase tel. cislo

Hide Advanced Settings

General data of your service provider

Domain: sip4.fayn.cz

Proxy server address: sip4.fayn.cz

Proxy server port: 5060

Registration server: sip4.fayn.cz

Registration server port: 5060

Registration refresh time: 3600 sec

Network data for your service provider

STUN enabled: Yes No

STUN server address:

STUN server port: 3478

STUN refresh time: 240 sec

NAT refresh time: 20 sec

Outbound proxy mode: Always Automatic Never

Outbound server address:

Outbound proxy port: 5060

Uložení nastavení → **Set** Cancel Delete Connection

(obrázek č. 7)

8) Pro uložení změn, stiskněte tlačítko **SET**.