




Nastavení domény pro telefony Siemens Gigaset


Typy: C610 IP, A510 IP, A580 IP, C590 IP

- 1) Pro vstup do webového rozhraní telefonu je nutné zjištění IP adresy. Pro zobrazení IP adresy na displeji Vašeho telefonu stiskněte tlačítko na základně (viz. obrázek č. 1).

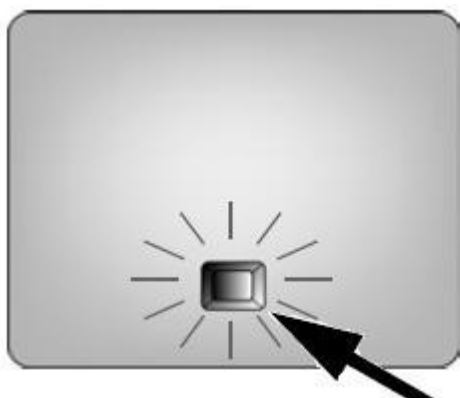


(obrázek č. 1)

- 2) IP adresu zobrazenou na displeji Vašeho telefonu zadejte do webového prohlížeče (viz. obrázek č. 2) a stiskněte **ENTER**.

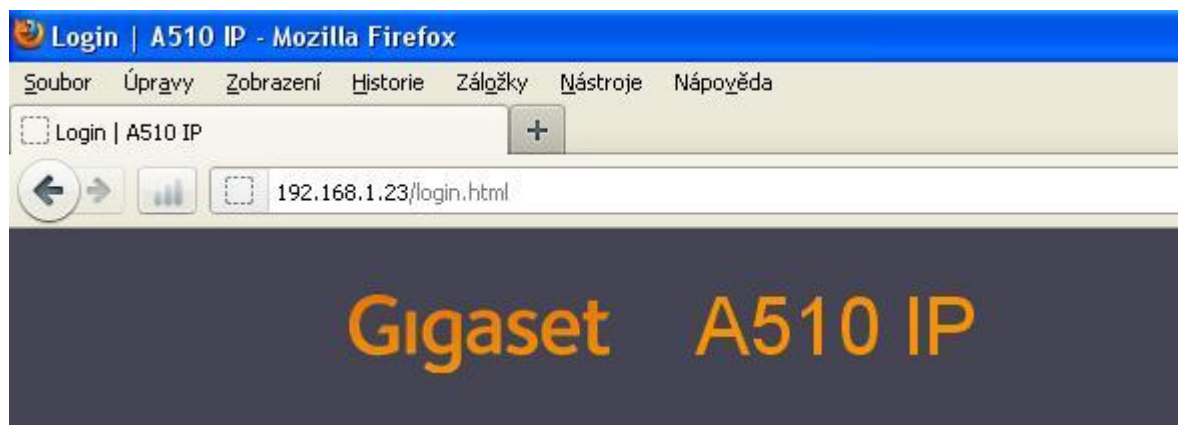


(obrázek č. 2)

- 3) Po zadání IP adresy do prohlížeče, se Vám zobrazí přihlašovací stránka (viz. obrázek č. 3). Zde do prázdného políčka zadejte svůj **PIN** (defaultně je PIN od výrobce přednastaven na **0000** (čtyři nuly) a stiskněte tlačítko **OK**.

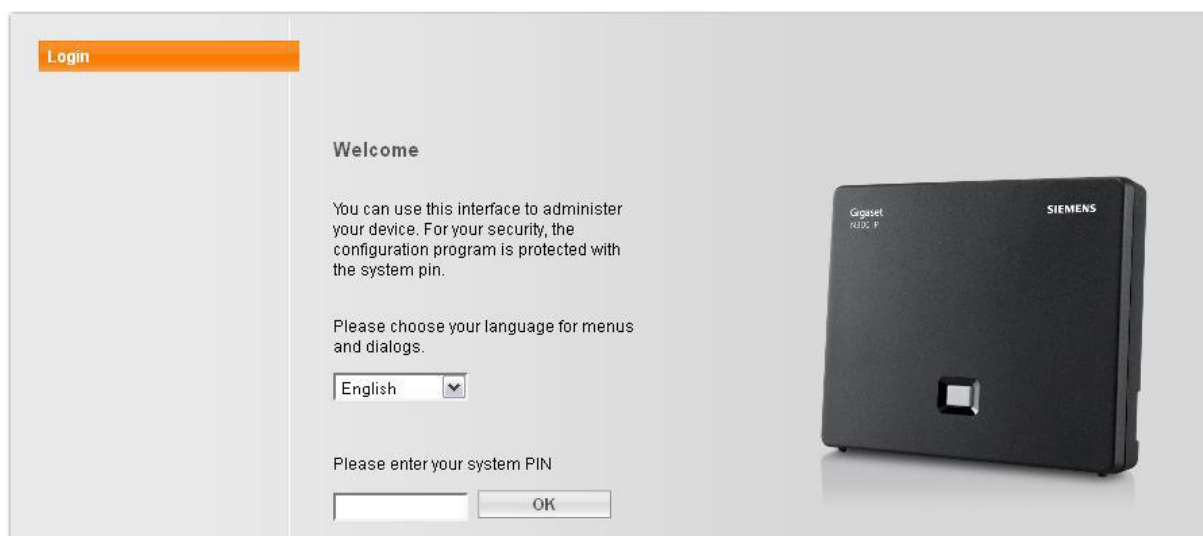


(obrázek č. 3)

4) Po přihlášení se přesuňte na záložku **SETTINGS** (viz. obrázek č. 4).

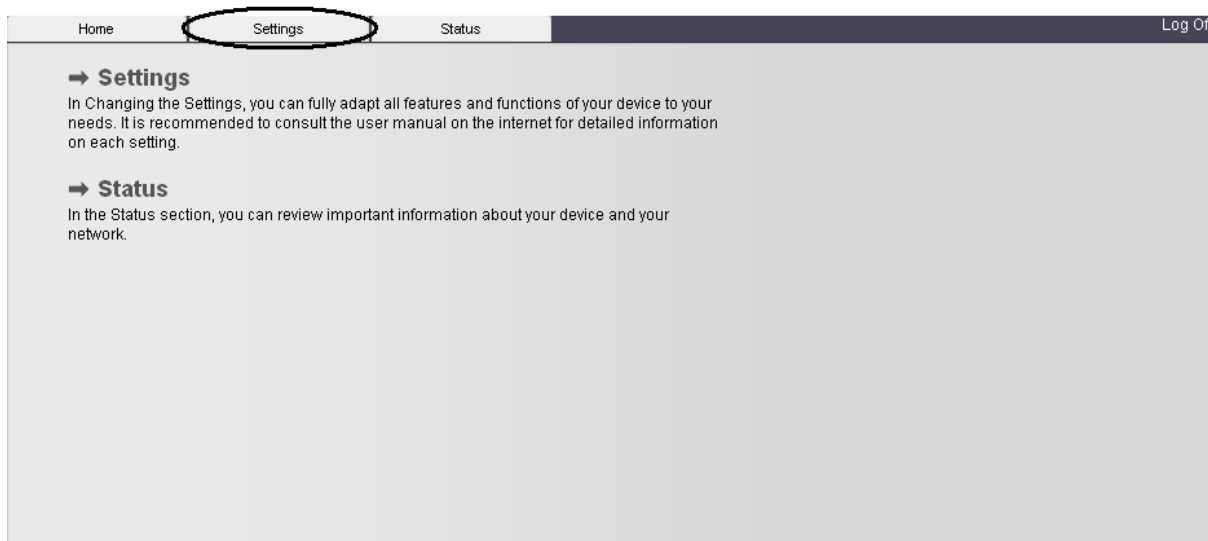

(obrázek č. 4)

5) Na stránce SETTINGS (viz. obrázek č. 5) vyberte položku **TELEPHONY** (viz. 1. krok). Poté stiskněte tlačítko **EDIT** v řádku 1. (IP1) (viz. 2. krok).

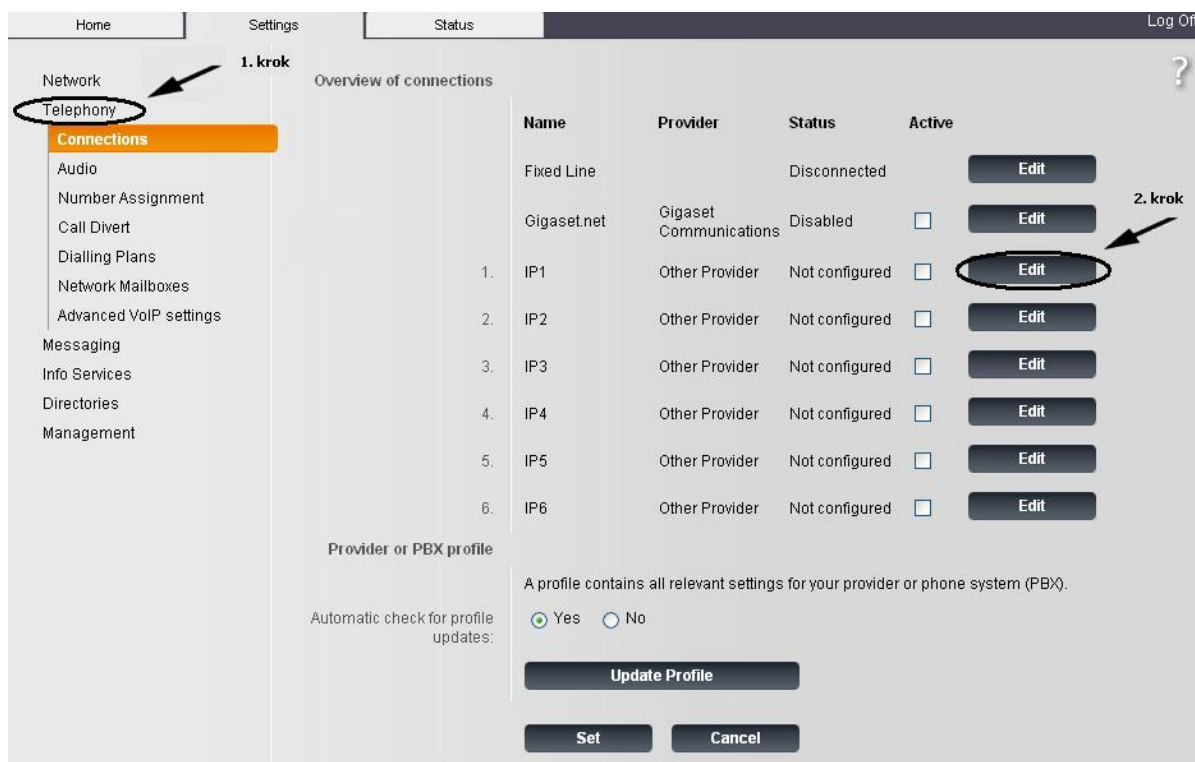

(obrázek č. 5)

- 6) Po stisknutí tlačítka EDIT se přesunete na stránku s nastavením Vašeho telefonního čísla (viz. obrázek č. 6). Stiskněte tlačítko **SHOW ADVANCED SETTINGS** (viz. 3. krok).

The screenshot shows a web interface for SIP configuration. The top navigation bar includes 'Home', 'Settings', 'Status', and 'Log Off'. The left sidebar lists various settings categories: Network, Telephony, Connections (highlighted in orange), Audio, Number Assignment, Call Divert, Dialling Plans, Network Mailboxes, Advanced VoIP settings, Messaging, Info Services, Directories, and Management. The main content area is titled '1. IP Connection' and contains the following fields and buttons:

- Connection Name or Number:** A text input field containing 'Vase tel. cislo'.
- Start Configuration Assistant:** A dark button.
- Provider:** A dropdown menu set to 'Other Provider'.
- Profile Version:** A text input field.
- Personal Provider Data:**
 - Authentication name:** A text input field containing 'Vase tel. cislo'.
 - Authentication password:** A text input field containing 'Vase SIP heslo'.
 - Username:** A text input field containing 'Vase tel. cislo'.
 - Display name:** A text input field containing 'Vase tel. cislo'.
- Show Advanced Settings:** A dark button, highlighted with a red oval and an arrow labeled '3. krok'.
- Set, Cancel, Delete Connection:** Three dark buttons at the bottom.

(obrázek č. 6)

- 7) Změnu ústředny provedete změnou adresy v řádcích **DOMAIN**, **PROXY SERVER ADDRESS** a **REGISTRATION SERVER** na **sip5.fayn.cz** (viz. obrázek č. 7, 4.krok, níže).

Home Settings Status Log Off

Network
Telephony
Connections
Audio
Number Assignment
Call Divert
Dialling Plans
Network Mailboxes
Advanced VoIP settings
Messaging
Info Services
Directories
Management

1. IP Connection

Assign a connection name or actual phone number for identification.

Connection Name or Number:

VoIP Configuration / Profile Download

Provider: Other Provider

Profile Version

Start Configuration Assistant

Personal Provider Data

Authentication name:

Authentication password:

Username:

Display name:

Hide Advanced Settings

General data of your service provider

Domain:

Proxy server address:

Proxy server port:

Registration server:

Registration server port:

Registration refresh time: sec

Network data for your service provider

STUN enabled: ☐ Yes ☒ No

STUN server address:

STUN server port:

STUN refresh time: sec

NAT refresh time: sec

Outbound proxy mode: ☐ Always ☒ Automatic ☐ Never

Outbound server address:

Outbound proxy port:

Uložení nastavení **Set** **Cancel** **Delete Connection**

4. krok

(obrázek č. 7)

8) Pro uložení změn, stiskněte tlačítko **SET**.